

Bloodbank Refrigerator LabStar Sanguis LSSA

- Forced air circulation , automatic defrost and condensate evaporation
- Micro-processor driven temperature controller
 - Visual/audible alarm device, mains-independent
 - Alarm warning for excess and insufficient temperature
 - Power failure alarm
 - Probe failure alarm
 - Door alarm
 - Integrated data logger
 - USB port for data download
 - Circular chart recorder for 7 days
- No-volt remote alarm contact for connection to a remote alarm system
- External housing made of white corrosion-resistant, galvanized steel plate with PVC finish
- Self-closing and lockable door
- Door hinges on right, changeable
- Door seal changeable
- 2 drawers with telescopic slide-out
- Interior made of stainless steel CNS
- Interior lighting
- 4 castors, 2 height adjustable feet at rear



LabStar Sanguis LSSA1104GEWU

Model LabStar Sanguis LSSA1104GEWU

Temperature range	°C:	+2/+6
Content	litres (gross):	100
Ext. dimensions (WxDxH)	mm:	600x600x850
Int. dimensions (WxDxH)	mm:	475x440x460
Depth with door opened	mm:	1135
Drawers	:	2
Number of blood bags à 450 ml	:	64
Weight	kgs:	80
Mains connection	:	1/N/PE ~ 230 V 50 Hz
Shipping dimensions (WxDxH)	mm:	680x680x1050
Shipping weight	kgs:	91
Refrigerant CFC- and HCFC-free	:	R134a



drawer with telescopic slide-out

LabStar Sanguis + Accessories: Outside / Inside Cat. No.

LabStar Sanguis LSSA1104GEWU	white, glass door / CNS	GSLSSA1104GEWU
ProfiTec Temperature Monitoring and Recording System (see sep. brochure).		GPTEC4A
ProfiCaller telephone dialler (see sep. brochure).		on request
Pt-100 temperature sensor, add. installed for ext. temperature recording.		ZXX2-020-2L
SMS alarm (to 5 mobile numbers maximum).		on request
7-day circular charts. Pck. of 100 pieces.		on request
Internal dividers for drawer. 1 set consisting of 3 dividers.		ZLSSA4-010
MIN/MAX thermometer to be placed in refrigerators or freezers.		ZXX2-019-001
Measuring range -50/+50 °C, an add. temperature sensor is not required.		
MIN/MAX digital thermometer. Hand-held unit with digital display as well as data-hold and relative measuring function. Measuring range -200/+1370 °C.		ZXX2-019-011
An add. temperature sensor is required, eg. Cat.-No. ZXX2-022-100.		
Temperature sensor for MIN/MAX thermometer ZXX2-019-011.		ZXX2-022-100
Measuring range -100/+1000 °C. Length 2 m. Other ranges on request.		
Export version with special voltages / frequencies.		on request


ProfiTec Intelligent Temperature Monitoring and Recording System



- For up to 4 refrigerators and/or freezers
- Readings are stored over a period up to 781 days
- Warning for excess and insufficient temperature
- Includes No-volt remote alarm contact
- The measuring protocol can be fed to PC via RS 232 port

Inventory Systems

Stainless steel racks, freezer cassettes and grid inserts enable specimens to be stored and retrieved in a clear and orderly manner. Optimum use is made of the storage capacity.

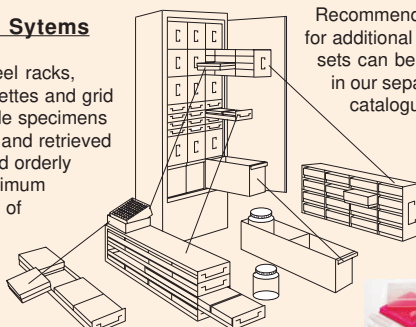

Recommendations for additional storage sets can be found in our separate catalogue.



Please ask for a personal fitting option.



MIN/MAX digital thermometer with add. temperature sensor